# Square Top Pickets / Shadowbox

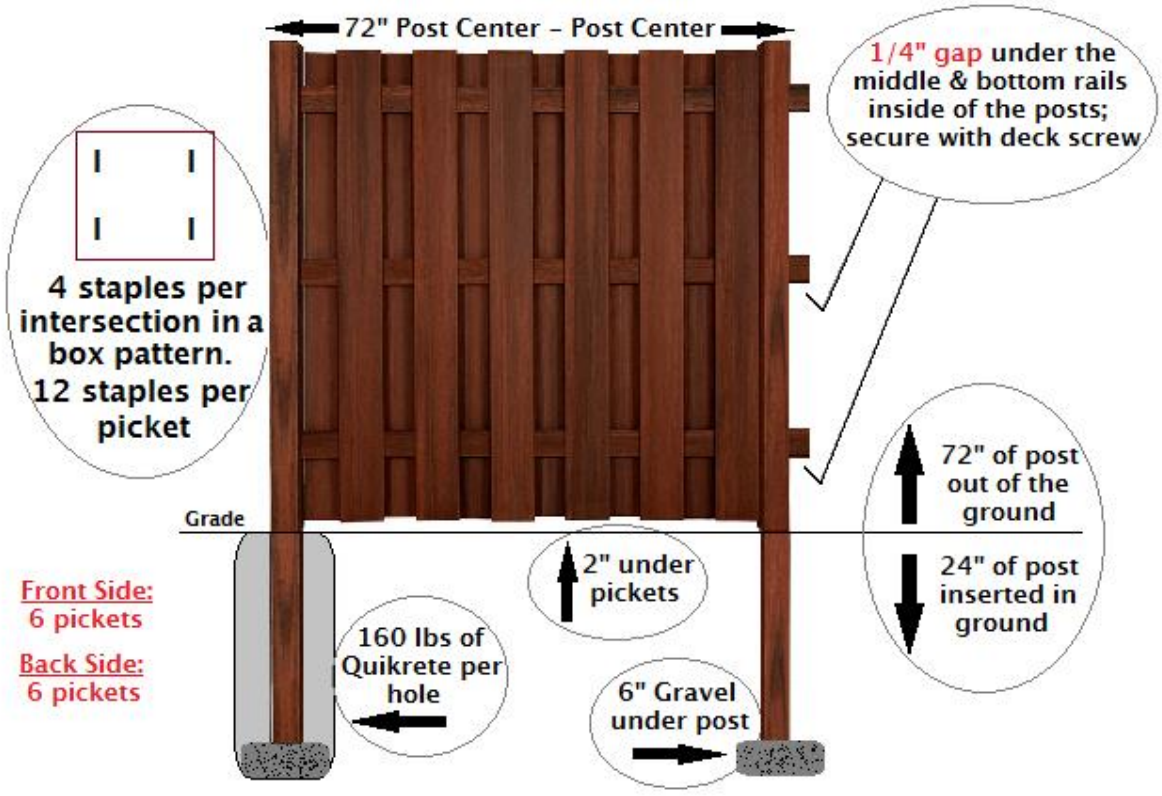
72" Post Center - Post Center
1/4" gap under the middle & bottom rails inside of the posts; secure with deck screw
4 staples per intersection in a box pattern. 12 staples per picket
Grade
72" of post out of the ground
24" of post inserted in ground
2" under pickets
160 lbs of Quikrete per hole
6" Gravel under post
Front Side:
6 pickets
Back Side:
6 pickets